

1. Display driver.

Turn OFF and disconnect score-board mains-power

Unscrew the Phillips-screws from one of the sides and remove the metalbar

Remove the fronts.

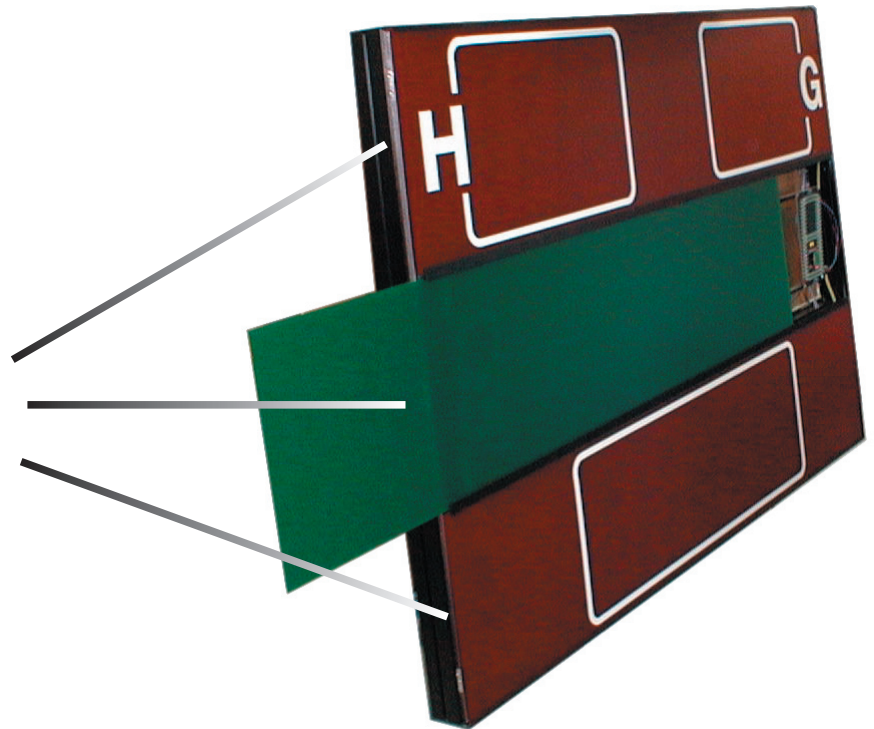


Fig. 1 Sample score-board

Locate the defective display.

Remove the small 4*4 cm printed circuit board (# 92030000/92030001).

Mount the new printed circuit board in the connector.

Connect mains power and turn on the power.

Test the score-board.

If no errors then mount the fronts again.

Mount the metalbar and fasten it with the Phillips-screws.

Indor Display Driver DD
Part no. 92030000

Outdoor Display Driver
DD with Lacquer.
Part no. 92030001

